



TF 2003 DURALUM




TF 2003 DURALUM 700
Cod. **02089305** EAN **8422248061971**

- ☐ **Mechanical control panel**
- ☐ 2 extraction levels
- ☐ Extraction power (according to UNE/EN 61591): **390m³/h - 150m³/h**
- ☐ Maximum air flow (free outlet): **600m³/h**
- ☐ **Sound power (Reg.(EU) n°65/2014): 45.5dB(A)**, maximum: 57dB(A)
- ☐ Tangential motor. Extra silent. Maximum energy consumption **100W**
- ☐ **High efficiency LED lighting**
- ☐ Easy-to-clean inner panel
- ☐ Easy-to-install system
- ☐ Dishwasher-washable filters
- ☐ **Finished in Stainless steel fingerprint free DurAlum**
- ☐ **Replaceable handrail**
- ☐ Max. pressure 194 Pa
- ☐ 120mm outlet diameter
- ☐ Energy Class: C

► **Accessories (not included)**

Active charcoal filter Cod. 02825263 / EAN 8422248006552.....
Check valve Cod. 02849003 / EAN 8422248044653.....

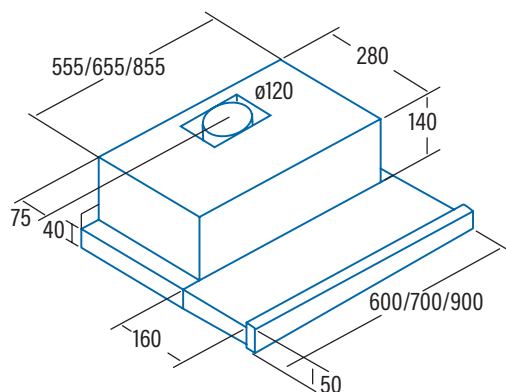

Code	02089305
EAN	8422248061971
Model	TF-2003 DURALUM 700
Type	Telescopic
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564	
AEC (Annual Energy consumption) (kWh/annum)	44,5
EEL class (Energy Efficiency Class)	C
FDE (Fluid Dynamic Efficiency)	11,9
FDE class (Fluid Dynamic Efficiency Class)	E
LE (Lighting Efficiency) (lux/W)	36
LE class (Lighting Efficiency Class)	A
GFE (Grease Filtering Efficiency)	68
GFE Class (Grease Filtering Efficiency class)	D
Air flow at minimum speed (m³/h)	150
Air flow at maximum speed (m³/h)	390
Air flow at intensive speed (TURBO) (m³/h)	-
Sound Power Level at minimum speed (dB)	45
Sound Power Level at maximum speed (dB)	57
Sound Power Level at intensive speed (TURBO) (dB)	-
Po (Power Consumption in off mode) (W)	0
Ps (Power Consumption in standby) (W)	0
Integration directive EU 66/2014	
f (Time Increase Factor)	1,6
EEL (Energy Efficiency Index)	78,2
QBEP (Flow Rate at Best Efficiency Point) (m³/h)	198,2
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	148
WBEP (Electric Power Input at Best Efficiency Point) (W)	68,6
WL (Nominal Power Consumption of Lighting system) (W)	7
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	252
External Dimensions	
Width (mm)	700
Depth (mm)	280
Total max height (mm)	180
Total min height (mm)	180
Outlet Diameter (mm)	120
Characteristics	
Motor	TF 2003
Extraction Levels	2
Motor Maximum Power Consumption	100
Maximum Pressure	194
Intensive Speed (TURBO) Pressure	-
Control Type	Rocker Switch
Automatic shut-down timer	-
Electronic Filter Saturation Indicator	-
Filter Type	Metallic
Anti-grease Filter Number	2
Inner Shield	√
Lighting	
Light Type	Ecoled
Adjustable Intensity Lighting	-
N° of Lamps	2
Installation	
Minimum height distance to a electric worktop hob (mm)	550
Minimum height distance to a gas worktop hob (mm)	650
Installation with Outlet tube to the exterior / Recirculating	BOTH
Easy Installation System	√
Electric Connection	
Total Rush Power (W)	107
Rated Voltage (V)	220-240
Network Frequency (Hz)	50
Electrical Insulation Class	CLASS I
Plug	-
Accessories	
Upper Decorative tube Extension	-
White Decorative Tube	-
Black Decorative Tube	-
Island Tube Enhancer	-
Check Valve	02849003
MAX PRO Metal Filter	-
Metal Filter	02825274*
DUAL Filter (metal + active charcoal)	-
Active Charcoal Filter	02825263
Noiseless Flexible Duct	-